



WORLD CLASS IN EVERY POSITION



**NOW WITH 3-YEAR /
3,000 HOURS WARRANTY***



**FREE 5-YEAR
TAKEUCHI FLEET
MANAGEMENT**

APRIL 2026

FEATURES NEW TB3150 / TB3150R

CONTENTS

OUR HISTORY, MISSION & FEATURES	03-05
MICRO	06
TB210R	
1.6 - 2.5 TONNE RANGE.....	08
TB216, TB320 & TB225	
3 - 9 TONNE RANGE	14
TB230, TB235-2, TB240, TB250-2, TB260, TB370 & TB290-2	
SHORT TAIL RANGE	26
TB217R, TB325R, TB335R, TB350R, TB257FR & TB280FR	
15 TONNE RANGE	36
TB3150R & TB3150	
WHEELED EXCAVATOR.....	40
TB370W & TB395W	
ELECTRIC EXCAVATOR	44
TB20e	
TRACK DUMPER.....	46
TCR50-3	
TRACK LOADERS	48
TL6R, TL8R-2, TL10V-2, TL12V-2	
BREAKER RANGE	52
TKB52, TKB72, TKB52-S, TKB72-S, TKB102-S, TKB302-S, TKB402-S & TKB802-S	
AUXILIARY FLOW & PRESSURE.....	58

EXCAVATOR WEIGHT CLASS

- 1-3 TONNE** : TB210R, TB216, TB217R, TB320, TB20e,
TB225 & TB325R
- 3-9 TONNE** : TB230, TB235-2, TB335R, TB240, TB250-2, TB350R,
TB257FR, TB260, TB370, TB280FR & TB290-2
- 15 TONNE** : TB3150R & TB3150
- WHEELED** : TB370W & TB395W

OUR HISTORY

Takeuchi UK started out in Rochdale in 1996 and have progressed with facilities both North (Rochdale) and South (Thatcham). The Takeuchi brand has built a reputation for quality and reliability with an extensive and experienced Dealer Network to support all our Takeuchi customers nationwide.

Over the years Takeuchi machines in their distinctive red and grey have become a popular first choice for construction, plant and tool hire, utilities, civils and ground engineering. The Takeuchi brand remains a favourite amongst machine operators worldwide.

Today Takeuchi continues to specialise in compact construction. Reliable high-performance excavators from 1 to 15 tonnes, together with hydraulic breakers, track loaders and track dumpers.

With more than 30 years of supply to the UK and Ireland you know...

YOU CAN TRUST TAKEUCHI FOR

- **HIGH PERFORMANCE**
- **PROVEN RELIABILITY**
- **ENGINEERED FOR DURABILITY**
- **EASY TO SERVICE**
- **DESIGNED FOR ALL DAY OPERATOR COMFORT**
- **MAXIMUM RESIDUAL VALUE**

INNOVATORS FOR THE INDUSTRY

- **1ST COMPACT TRACKED EXCAVATOR (TB1000)**
- **1ST RUBBER TRACKED EXCAVATOR (TB650S)**
- **1ST COMPACT TRACK LOADER (TL20)**
- **1ST FULL RADIUS WITH OFFSET BOOM**
- **1ST HYDRAULIC EXTENDED TRACKS**
- **1ST HYDRAULIC POWERED JOYSTICK CONTROLS**

OUR MISSION

Takeuchi are specialists in compact excavators and track loaders producing highly engineered machines that out perform year on year.

The confidence in Takeuchi's brand is as strong as ever, led by our high standard of creation and pioneering spirit which prioritise functionality and high performance on all models.

Made in Japan, Takeuchi manufactures highly precision engineered component parts using the latest design engineering technology and precision tooling. We manufacture genuine Takeuchi parts, accurately built to size and specification.

With a global perspective and sensitivity, we will provide our customers with truly reliable products and services.

As the pioneers of the compact excavator and track loader, we take pride in our ability to develop new and innovative products. Our research and development teams are continuously developing new product technologies, designs and patents into products for practical use.

We will continue to pursue the Takeuchi way, manufacturing activities while working together and sharing the spirit of Creation, Challenge and Cooperation.

CREATION we pledge to develop need responsive product, making the most of our awareness of, and relationship with our customers.

CHALLENGE we pledge to aim high and boldly take up challenges with imagination and energy.

COOPERATION we pledge to thrive in conjunction with society, cultivating a mindset based on harmony and thoughtfulness.

SUPPORTING YOUR PRODUCTS



*T&Cs apply
see website.



Machine service intervals
after initial 50 hours.



*Please refer to operator manual.



Use genuine Takeuchi
parts to protect your
investment.

TFM - TAKEUCHI FLEET MANAGEMENT

Takeuchi Fleet Management (TFM) is a remote Telematics monitoring tool that utilises machine data to better manage your fleet and keep costs down.



Providing alerts and machine information including location, utilisation, performance, and maintenance data to give insights into where and how equipment is being operated.

TFM is installed on machines 1.5-t and above. Takeuchi is providing TFM free of charge for first 5-years of ownership on most Takeuchi excavators.

Please check your TFM subscription with your local dealer.

TSS – PROTECT YOUR INVESTMENT



TSS allows only programmed keys for machine start-up; un-programmed keys alert the operator via the VDU and audible

alarm. TSS comes with 1 red master and 3 black ignition keys. Up to 13 user keys can be programmed for your fleet management.



MICRO

Small in size.
Big on compact performance.



The TB210R Micro is the smallest Takeuchi excavator weighing in at just 1150kg.

Its micro dimensions enable it to pass through a normal doorway making it ideal when working with restricted access. Expands to wider tracks for added stability when digging and tracking.

The TB210R has increased reach to 3220mm and dig depth to 1755mm. It's size and weight make it an easy trailer tow for convenience - perfect for the jobbing builder and landscaper.

TB210R



SPECIFICATION

Operating Weight (kg)	1150
Width (mm)	750 (1020)
Height (mm)	2190
Length (mm)	2955
Max Digging Depth (mm)	1755
Max Dump Height (mm)	2120
Max Ground Reach (mm)	3220
Max Bucket Digging Force (kN)	11.2
Max Arm Digging Force (kN)	6.4
Rated Power (kW/rpm)	8.9/2200
Hydraulic Breaker	TKB-52

1.6-2.5 TONNE RANGE

Compact in size
and powerful in
performance.



Takeuchi have a range of mini excavators, cab and canopies, compact in size and powerful in performance.

For hire, builders and utilities a 1.6 tonne remains the popular choice - Takeuchi's TB216 is a firm favourite.

With all the popular features including extendable tracks to 1300mm, maximum footwell visibility and powerful breakout force. Excellent performance in a compact size - a reliable machine, built for hire.

The TB320 offers 2 tonne excavating with best-in-class hydraulic flow (40 l/min) to run power-hungry attachments. Proportional controls and expanding tracks make the TB320 perfect for owner operators.

For a versatile 2.5 tonne road-towable mini digger the TB225 offers a powerful alternative, with boom and arm holding valves as standard.

For builders looking for added compact sizes with reduced or short tail operating, right up to walls, Takeuchi offer the TB217R and TB325R. See Short Tail range (Page 26)

A heavy duty dozer blade is standard on all models in this range.

*Now with full 3 year warranty / 3000 Hours.

- **MAXIMUM DIGGING DEPTHS**
- **ADDED STABILITY WITH EXTENDING TRACKS**
- **ADJUSTABLE DOZER BLADES**
- **MAXIMUM OPERATOR COMFORT**

TB216



**FULL
3-YEAR
3,000 HOUR*
WARRANTY**

**FREE 5-YEAR
TAKEUCHI FLEET
MANAGEMENT**



SPECIFICATION

Operating Weight (kg).....	1865
Width (mm).....	1055
Extended Tracks Width (mm).....	980-1300
Height (mm).....	2360
Length (mm).....	3870
Max Dig Depth (mm).....	2390
Max Dump Height (mm).....	2705
Max Ground Reach (mm).....	4035
Max Bucket Digging Force (kN).....	14
Max Arm Digging Force (kN).....	8.2
Rated Power (kW/rpm).....	11.5/2400
Hydraulic Breakers.....	TKB52-S & TKB72-S

TB216



**FULL
3-YEAR
3,000 HOUR*
WARRANTY**

**FREE 5-YEAR
TAKEUCHI FLEET
MANAGEMENT**



SPECIFICATION

Operating Weight (kg).....	1770
Width (mm).....	985
Extended Tracks Max Width (mm).....	980-1300
Height (mm).....	2280
Length (mm).....	3870
Max Digging Depth (mm).....	2390
Max Dump Height (mm).....	2705
Max Ground Reach (mm).....	4035
Max Bucket Digging Force (kN).....	14
Max Arm Digging Force (kN).....	8.2
Rated Power (kW/rpm).....	11.5/2400
Hydraulic Breakers.....	TKB52-S & TKB72-S

TB320



**FULL
3-YEAR
3,000 HOUR*
WARRANTY**

**FREE 5-YEAR
TAKEUCHI FLEET
MANAGEMENT**



SPECIFICATION

Cab/Canopy

Operating Weight (kg)	2060/1930
Width (mm)	1050/985
Extended Tracks Width (mm)	980-1370
Height (mm)	2375/2300
Length (mm)	3910
Max Dig Depth (mm)	2370
Max Dump Height (mm)	2725
Max Ground Reach (mm)	4035
Max Bucket Digging Force (kN)	17
Max Arm Digging Force (kN)	9.1
Rated Power (kW/rpm)	12/2500
Hydraulic Breakers	TKB72-S

TB225



**FULL
3-YEAR
3,000 HOUR*
WARRANTY**

**FREE 5-YEAR
TAKEUCHI FLEET
MANAGEMENT**



SPECIFICATION

Cab/Canopy

Operating Weight (kg)	2400/2265
Width (mm)	1100
Extended Tracks Width (mm)	1100-1500
Height (mm)	2430/2355
Length (mm)	4375
Max Dig Depth (mm)	2580
Max Dump Height (mm)	2875
Max Ground Reach (mm)	4250
Max Bucket Digging Force (kN)	19.3
Max Arm Digging Force (kN)	12.8
Rated Power (kW/rpm)	16.5/2200
Hydraulic Breaker	TKB102-S

3-9 TONNE RANGE

Outperforms
in this busy
weight class.



Takeuchi's established range of 3-9 tonne mini excavators are compact in size, comfortable to operate and built for site, with strong hinged and lockable steel panels and rounded counterbalance.

This proven range offers maximum operating parameters, outperforming in every weight class with powerful breakout force and increased reach across all models.

All machines have plenty of power and greater torque along with a well proven, high performance hydraulic system for greater oil flow, faster cycle times and increased efficiency.

A heavy-duty dozer blade with float is fitted as standard on all models from 3-tonne and above.

Maximum all day comfort with high visibility cabs, the machines are built with the operator in mind. Safe and easy to operate with a well-positioned colour VDU illuminates active operating switch functions and maintenance alerts.

All models from 3 to 9 tonne come with enhanced machine features as standard including: LED work zone lighting, boom and arm holding valves, password secure auxiliary presets and factory fitted steel hydraulic hitch pipework.

- **MASSIVE OPERATING CAPACITY**
- **COMFORTABLE WORKING ENVIRONMENT**
- **POWERFUL OPERATING PERFORMANCE**

TB230



TB235-2



**FULL 3-YEAR 3,000 HOUR WARRANTY**

**FREE 5-YEAR TAKEUCHI FLEET MANAGEMENT**

**TAKEUCHI SECURITY SYSTEM**

**250hrs***

**FULL 3-YEAR 3,000 HOUR WARRANTY**

**FREE 5-YEAR TAKEUCHI FLEET MANAGEMENT**

**TAKEUCHI SECURITY SYSTEM**

**250hrs***

SPECIFICATION	Cab/Canopy
Operating Weight (kg)	2875/2810
Width (mm)	1450
Height (mm)	2525/2540
Length (mm)	4595
Max Digging Depth (mm)	2835
Max Dump Height (mm)	3230
Max Ground Reach (mm)	4710
Max Bucket Digging Force (kN)	20.9
Max Arm Digging Force (kN)	12.9
Rated Power (kW/rpm)	18.2/2400
Hydraulic Breaker	TKB102-S

SPECIFICATION	
Operating Weight (kg)	3465
Width (mm)	1580
Height (mm)	2495
Length (mm)	4900
Max Digging Depth (mm)	3245
Max Dump Height (mm)	3595
Max Ground Reach (mm)	5130
Max Bucket Digging Force (kN)	27.1
Max Arm Digging Force (kN)	17.3
Rated Power (kW/rpm)	18.2/2400
Hydraulic Breaker	TKB102-S

TB240



**FULL
3-YEAR
3,000 HOUR*
WARRANTY**

**FREE 5-YEAR
TAKEUCHI FLEET
MANAGEMENT**



SPECIFICATION

Operating Weight (kg).....	4080
Width (mm).....	1740
Height (mm).....	2490
Length (mm).....	5085
Max Digging Depth (mm).....	3465
Max Dump Height (mm).....	3825
Max Ground Reach (mm).....	5425
Max Bucket Digging Force (kN).....	30.8
Max Arm Digging Force (kN).....	18.3
Rated Power (kW/rpm).....	26.7/2200
Hydraulic Breaker.....	TKB302-S

TB250-2



**FULL
3-YEAR
3,000 HOUR*
WARRANTY**

**FREE 5-YEAR
TAKEUCHI FLEET
MANAGEMENT**



SPECIFICATION

Operating Weight (kg).....	5120
Width (mm).....	1840
Height (mm).....	2555
Length (mm).....	5495
Max Dig Depth (mm).....	3780
Max Dump Height (mm).....	4045
Max Ground Reach (mm).....	5985
Max Bucket Digging Force (kN).....	37.3
Max Arm Digging Force (kN).....	23.4
Rated Power (kW/rpm).....	29.1/2400
Hydraulic Breaker.....	TKB302-S

TB260



TB260

6 TONNES OF
COMPACT, SMOOTH
AND POWERFUL
PERFORMANCE



**FULL
3-YEAR
3,000 HOUR*
WARRANTY**

**FREE 5-YEAR
TAKEUCHI FLEET
MANAGEMENT**



SPECIFICATION

Operating Weight (kg).....	5735
Width (mm).....	2000
Height (mm).....	2560
Length (mm).....	5550
Max Dig Depth (mm).....	3895
Max Dump Height (mm).....	4220
Max Ground Reach (mm).....	6130
Max Bucket Digging Force (kN).....	43.2
Max Arm Digging Force (kN).....	25.6
Rated Power (kW/rpm).....	35.5/2400
Hydraulic Breaker.....	TKB302-S





TB370

TILT-UP THE CAB

Giving unrivalled service access.



TB370



AVAILABLE
WITH 2 PIECE
BOOM

**FULL
3-YEAR
3,000 HOUR
WARRANTY**

**FREE 5-YEAR
TAKEUCHI FLEET
MANAGEMENT**



SPECIFICATION

Operating Weight (kg) Mono Boom/2 Piece Boom	6815/7060
Width (mm)	2100
Height (mm)	2580
Length (mm)	5950/5900
Max Dig Depth (mm)	4085/4110
Max Dump Height (mm)	4545/4955
Max Ground Reach (mm)	6565/6785
Max Bucket Digging Force (kN)	48.4
Max Arm Digging Force (kN)	29.4
Rated Power (kW/rpm)	42.2/2000
Hydraulic Breaker	TKB302-S

e: sales@msmdrh.co.uk

TB290-2

AVAILABLE
WITH 2 PIECE
BOOM



TB290-2

9 TONNES OF POWER
PERFORMANCE
- WITH MASSIVE
BREAKOUT FORCE



**FULL
3-YEAR
3,000 HOUR*
WARRANTY**

**FREE 5-YEAR
TAKEUCHI FLEET
MANAGEMENT**



SPECIFICATION

Operating Weight (kg) Mono Boom/2 Piece Boom	8664/8950
Width (mm).....	2300
Height (mm).....	2550
Length (mm).....	6695/6790
Max Dig Depth (mm).....	4580/4470
Max Dump Height (mm).....	5260/6120
Max Ground Reach (mm)	7290/7590
Max Bucket Digging Force (kN)	59.1
Max Arm Digging Force (kN)	40
Rated Power (kW/rpm).....	51.6/2000
Hydraulic Breaker	TKB402-S



SHORT TAIL RANGE

Compact
excavating with
reduced tail swing.



Takeuchi have a complete range of short tail excavators for restricted working space.

- Short Tail - TB210R micro and TB217R
- 3-Series Short Tail - TB325R , TB335R and TB350R
- Short Tail with FR Full Radius STS Boom – TB257FR and TB280FR.

Working in congested or confined areas can be a challenge. By reducing the excavator tail swing, Takeuchi short tail machines can work in areas where conventional profile excavators would risk damage.

With a reduced tail swing excavator, the upper structure and cab only exceeds the track footprint by centimetres. Allowing operators to work and rotate right up to walls without potentially damaging the machine.



TB217R



**FULL
3-YEAR
3,000 HOUR*
WARRANTY**

**FREE 5-YEAR
TAKEUCHI FLEET
MANAGEMENT**



SPECIFICATION

Operating Weight (kg)	1680
Width (mm)	980
Extended Tracks Max Width (mm)	1300
Height (mm)	2345
Length (mm)	3460
Max Dig Depth (mm)	2390
Max Dump Height (mm)	2545
Max Ground Reach (mm)	3945
Max Bucket Digging Force (kN)	14
Max Arm Digging Force (kN)	8.2
Rated Power (kW/rpm)	11.5/2400
Hydraulic Breaker	TKB52-S

TB325R



**FULL
3-YEAR
3,000 HOUR*
WARRANTY**

**FREE 5-YEAR
TAKEUCHI FLEET
MANAGEMENT**



SPECIFICATION

Operating Weight (kg)	2450/2320
Width (mm)	1500
Height (mm)	2490/2420
Length (mm)	4020
Max Digging Depth (mm)	2540
Max Dump Height (mm)	2775
Max Ground Reach (mm)	4350
Max Bucket Digging Force (kN)	19.3
Max Arm Digging Force (kN)	11.3
Rated Power (kW/rpm)	16.5/2200
Hydraulic Breaker	TKB102-S

Cab/Canopy

TB335R



**FULL
3-YEAR
3,000 HOUR*
WARRANTY**

**FREE 5-YEAR
TAKEUCHI FLEET
MANAGEMENT**



SPECIFICATION

Operating Weight (kg)	3770
Width (mm).....	1740
Height (mm).....	2490
Length (mm).....	4890
Max Digging Depth (mm).....	3205
Max Dump Height (mm).....	3530
Max Ground Reach (mm).....	5305
Max Bucket Digging Force (kN).....	27.1
Max Arm Digging Force (kN).....	19.1
Rated Power (kW/rpm).....	18.2/2300
Hydraulic Breaker	TKB102-S

TB350R



**FULL
3-YEAR
3,000 HOUR*
WARRANTY**

**FREE 5-YEAR
TAKEUCHI FLEET
MANAGEMENT**




SPECIFICATION

Operating Weight (kg).....	5095
Width (mm).....	2000
Height (mm).....	2540
Length (mm).....	5390
Max Digging Depth (mm).....	3575
Max Dump Height (mm).....	3945
Max Ground Reach (mm).....	5925
Max Bucket Digging Force (kN).....	37.3
Max Arm Digging Force (kN).....	22.4
Rated Power (kW/rpm).....	32.4/2000
Hydraulic Breaker.....	TKB302-S



FR RANGE

Side-To-Side
Offset Boom.

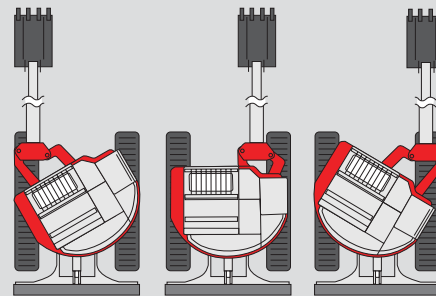

FR WITH
SIDE-TO-SIDE
STS BOOM

360°
OFFSET
BOOM

The FR range of Takeuchi short tail swing machines provide the most versatile excavators on site. The combination of near zero tail with a unique STS (SIDE-TO-SIDE) boom gives unmatched operator benefits especially where access and working space is restricted.

The unique patented STS offset boom allows, for parallel trenching right next to walls and buildings. A foot operated pedal allows you to position the STS offset boom anywhere across the front of the machine.

Combining **360° PERFORMANCE** and **SHORT TAIL SWING** to get faster cycle times and less risk of machine damage.

TB257FR



**FULL
3-YEAR
3,000 HOUR
WARRANTY**

**FREE 5-YEAR
TAKEUCHI FLEET
MANAGEMENT**



SPECIFICATION

Operating Weight (kg)	5865
Width (mm)	2000
Height (mm)	2575
Length (mm)	5395
Max Digging Depth (mm)	3895
Max Dump Height (mm)	3890
Max Ground Reach (mm)	6080
Max Vertical Dig Depth (mm)	3160
Max Bucket Digging Force (kN)	36.6
Max Arm Digging Force (kN)	23.1
Rated Power (kW/rpm)	39/2200
Hydraulic Breaker	TKB302-S

TB280FR



**FULL
3-YEAR
3,000 HOUR
WARRANTY**

**FREE 5-YEAR
TAKEUCHI FLEET
MANAGEMENT**



SPECIFICATION

Operating Weight (kg)	8500
Width (mm)	2170
Height (mm)	2725
Length (mm)	6285
Max Digging Depth (mm)	4540
Max Dump Height (mm)	4480
Max Ground Reach (mm)	7195
Max Bucket Digging Force (kN)	46.7
Max Arm Digging Force (kN)	31.3
Rated Power (kW/rpm)	51.6/2000
Hydraulic Breakers	TKB302-S & TKB402-S



NEW TB3150R

**15-TONNE SHORT TAIL SWING
& Conventional Fixed Boom Excavator.**

The NEW TB3150R features a fixed conventional boom and reduced tail swing providing more than 15 tonnes of powerful performance.

A very compact machine in this weight class that can get to work in confined spaces.

The NEW TB3150R features the fuel saving EH electro hydraulic control system for travel, blade and boom cylinders.

With a robust long-arm mono-boom as standard and optional 2-piece boom. Powered by the latest 85kW Yanmar engine.

- **MASSIVE OPERATING CAPACITY**
- **MAXIMUM OPERATOR COMFORT**
- **HIGH FLOW AUX 1**
- **WIDE STEEL TRACKS AS STANDARD**
- **MAXIMUM ALL-ROUND VISIBILITY**
- **HYBRID EH / HYDRAULIC CONTROLS**



SPECIFICATION	Long-Arm Standard	2-Piece Option
Operating Weight (kg)	16075	16580
Width (mm)	2690	2690
Overall Height (mm)	3245	3090
Length (Transporting) (mm)	7945	7915
Max Digging Depth (mm)	6055	5745
Max Dump Height (mm)	7145	7465
Max Reach at Ground Level (mm)	8670	8735
Max Bucket Digging Force (kN)	96.3	96.3
Max Arm Digging Force (kN)	60.0	60.0
Rated Power Rated Output (kW)	85/2200	85/2000
Hydraulic Breakers	TKB802-S	TKB802-S



NEW TB3150

15-TONNE

Powerful Offset Boom Excavator.

Takeuchi's NEW TB3150 offers unique 15 tonne operating performance, powerful breakout force and massive offset boom flexibility. With the offset operators get unrivalled accessibility on built-up construction sites.

The largest Takeuchi excavator, the TB3150 offers a massive 96.3kN bucket breakout force, providing the power required for large groundworks.

The NEW TB3150 features the fuel saving EH electro hydraulic control system for travel, blade and boom cylinders. Powered by the latest 85kW Yanmar engine.

- **FIXED CONVENTIONAL BOOM**
- **POWERFUL OPERATING PERFORMANCE**
- **MAXIMUM ALL-ROUND VISIBILITY**
- **HIGH FLOW AUX 1**
- **WIDE STEEL TRACKS AS STANDARD**
- **HYBRID EH / HYDRAULIC CONTROLS**

NEW 3 SERIES **TB3150**



SPECIFICATION

Operating Weight (kg)	15895
Width (mm).....	2690
Height (mm).....	2950
Length (mm).....	7825
Max Digging Depth (mm)	5220
Max Dump Height (mm).....	6045
Max Ground Reach (mm)	8330
Max Arm Digging Force (kN)	96.3
Rated Power (kW/rpm).....	85/2000
Hydraulic Breaker	TKB802-S



WHEELED EXCAVATORS

Versatile Site Ready

The 3-SERIES TB395W with 2-piece boom sets the standard for wheeled excavating. Combining massive power performance and exceptional on-road features into a site ready and compact wheeled excavator.

A powerful 4 dual-wheel drive machine with diff-lock for added traction. The TB395W has 4WD / 4WS with crab mode and mudguards as standard.

Designed and built for site with optional out-riggers for added stability.

A very flexible versatile machine designed for maximum productivity; powered by a 85kW Deutz engine with SCR technology, delivering maximum breakout force and compliant emission control. LED lights and reversing camera with colour display adds to on-site safety.

TB370W

A compact wheeled excavator/ tool carrier in the 7.5 tonne weight class designed for maximum productivity.

Versatile and nimble on-site the TB370W has a 2-piece boom, 4WD and mudguards as standard.

The auto digging brake and ECO Plus mode deliver added on-site efficiency and its unique tilt-up cab gives unrivalled service access.



TB370W



**FULL
3-YEAR
3,000 HOUR
WARRANTY**

**FREE 5-YEAR
TAKEUCHI FLEET
MANAGEMENT**



SPECIFICATION

Operating Weight (kg)	7555
With Outriggers (kg)	7900
Width (mm)	2100
Height (mm) with Roofguard	2920
Length (mm)	6025
Overall Length on Road (mm)	4770
Max Digging Depth (mm)	3775
Max Dump Height (mm)	5290
Max Ground Reach (mm)	6705
Max Vertical Digging Depth (mm)	3505
Max Bucket Digging Force (kN)	48.4
Max Arm Digging Force (kN)	29.4
Rated Power (kW/rpm)	54.6/2700
Hydraulic Breaker	TKB302-S

TB395W



**FULL
3-YEAR
3,000 HOUR
WARRANTY**

**FREE 5-YEAR
TAKEUCHI FLEET
MANAGEMENT**



SPECIFICATION

Operating Weight (kg)	10225
With Outriggers (kg)	10625
Width/with mudguards (mm)	2320/2360
Height (mm) with Roofguard	3055
Length (mm)	6555
Overall Length on Road (mm)	5580
Max Digging Depth (mm)	4095
Max Dump Height (mm)	6240
Max Ground Reach (mm)	7450
Max Vertical Digging Depth (mm)	3525
Max Bucket Digging Force (kN)	58.9
Long Arm Digging Force (kN)	39.7
Rated Power (kW/rpm)	85/2200
Hydraulic Breakers	TKB402-S & TKB802-S



ELECTRIC EXCAVATOR

100% Battery Powered.

OPTIONAL
FAST
CHARGER

The TB20e is the latest innovation in the Takeuchi excavator line-up. A fully electric machine, and the first Takeuchi excavator to feature electro-hydraulic controls. **Now available as a cab and canopy.**

Built with the same all steel construction, heavy duty boom and retractable under carriage, matching the performance of its diesel equivalent TB216. The TB20e is 100% battery powered with zero exhaust emissions. With a full charge the 24.7kWh maintenance free lithium-ion battery provides* up to 8 hours of operating time at 65% load, dependant on application.

The TB20e is ideal for applications in noise sensitive areas such as schools or hospitals, operating at 80dB and 15% quieter than a diesel excavator. This environment friendly option offers a more sustainable choice.

The TB20e features as standard

- **On-board charger - charge static or charge whilst operating**

Optional Fast Charger

- **Off-board FAST charger - reducing charge time to 2-4 hours.**

TB20e
electric power



FREE 5-YEAR
TAKEUCHI FLEET
MANAGEMENT

SPECIFICATION

Cab/Canopy

Operating Weight (kg)	2125 / 1930
Width (mm)	985-1300
Height (mm)	2355 / 2280
Length (mm)	4040
Max Digging Depth (mm)	2390
Max Dump Height (mm)	2705
Max Bucket Digging Force (kN)	13.7
Battery Capacity (kWh)	24.7
Continuous Working Time	Up to 8 Hours*
Battery Charge Hours 20-80%	
Off-Board Charger @ 340 - 460V	Approx. 2 hours
On-Board Charger @ 95 - 265V	Approx. 6 hours
Battery Charge Hours 0-100%	
Off-Board Charger @ 340 - 460V	Approx. 4 hours
On-Board Charger @ 95 - 265V	Approx. 10 hours
Noise dB	.80



TCR50-3 TRACK DUMPER

Full Pilot Control with
180° skip tipping.

The TCR50-3 track dumper offers greater functionality, performance, comfort and serviceability.

With an ample 65° dumping angle and 3,700 kg maximum loading weight, the operator always gets maximum load discharged with just a single operation.

Left and right skip-tip function (180°) for efficient sideways dumping in reduced spaces, limits the need to continually reposition the machine and improves productivity.

COMFORTABLE OPERATOR STATION - features an intuitive colour multi-informational display with standard rear camera view function, hydraulic pilot joystick controls, adjustable suspension seat, air conditioner, radio with USB and cup holder for superior operator comfort and less fatigue.

TCR50-3



SPECIFICATION

Weight (kg)	6550
Overall Height (mm)	2725
Overall Length (mm).....	4660
Overall Width (mm)	2200
Track Length - Ground (mm)	2500
Maximum Load Capacity (kg).....	3700
Skip Capacity Flat/Heaped (m³).....	1.15/2.055
Skip Floor Height (mm).....	1330
Skip Length - Inside (mm)	2615
Skip Width (mm)	1795
Slew Left/Right.....	90°
Skip Tip Angle.....	65°
Rated Power (kW/rpm)	88.4/2500

TL6R



**FULL
3-YEAR
3,000 HOUR
WARRANTY**

 **FREE 5-YEAR
TAKEUCHI FLEET
MANAGEMENT**

SPECIFICATION

Operating Weight - Cab (kg)	3530
Overall Width without Bucket (mm)	1530
Transport Height with Roof Guard (mm)	1975
Tipping Load (kg)	2390
Rated Operating Capacity @ 35%* (kg)	835
Operating Load @ 50% of Tip Load (kg)	1195
Max. Lift Height to Bucket Pin (mm)	2905
Dump Height Fully Raised (mm)	2275
Bucket Breakout Force (kN)	26.4
Lift Arm Breakout Force (kN)	21.6
Primary flow - Aux (l/min)	67
Rated Output (kW) / rpm	47.9 / 2700

TL8R-2



**FULL
3-YEAR
3,000 HOUR
WARRANTY**

 **FREE 5-YEAR
TAKEUCHI FLEET
MANAGEMENT**

SPECIFICATION

Operating Weight - Cab (kg)	4165
Overall Width without Bucket (mm)	1660
Transport Height with Roof Guard (mm)	2290
Tipping Load (kg)	2740
Rated Operating Capacity @ 35%* (kg)	960
Operating Load @ 50% of Tip Load (kg)	1370
Max. Lift Height to Bucket Pin (mm)	3080
Dump Height Fully Raised (mm)	2420
Bucket Breakout Force (kN)	27.6
Lift Arm Breakout Force (kN)	26.5
Primary flow - Aux (l/min)	72.3
High flow - Aux (l/min)	128
Rated Output (kW) / rpm	54.6 / 2600

TL10V-2

TL12V-2



FULL
3-YEAR
3,000 HOUR
WARRANTY



FREE 5-YEAR
TAKEUCHI FLEET
MANAGEMENT

FULL
3-YEAR
3,000 HOUR
WARRANTY



FREE 5-YEAR
TAKEUCHI FLEET
MANAGEMENT

SPECIFICATION

Operating Weight - Cab (kg)	4660
Overall Width without Bucket (mm)	1740
Transport Height with Roof Guard (mm)	2310
Tipping Load (kg)	3270
Rated Operating Capacity @ 35%* (kg)	6025
Operating Load @ 50% of Tip Load (kg)	1635
Max. Lift Height to Bucket Pin (mm)	3170
Dump Height Fully Raised (mm)	2435
Bucket Breakout Force (kN)	29
Lift Arm Breakout Force (kN)	24
Primary flow - Aux (l/min)	71
High flow – Aux (l/min)	124
Rated Output (kW) / rpm	54.6 / 2600

SPECIFICATION

Operating Weight - Cab (kg)	5895
Overall Width without Bucket (mm)	1960
Transport Height with Roof Guard (mm)	2380
Tipping Load (kg)	5325
Rated Operating Capacity @ 35%* (kg)	1865
Operating Load @ 50% of Tip Load (kg)	2663
Max. Lift Height to Bucket Pin (mm)	3300
Dump Height Fully Raised (mm)	2460
Bucket Breakout Force (kN)	35
Lift Arm Breakout Force (kN)	31.6
Primary flow - Aux (l/min)	88
High flow – Aux (l/min)	153
Rated Output (kW) / rpm	81.8 / 2400

BREAKER RANGE

A Breaker model to suit every size of Takeuchi.



A range of hydraulic breakers for tool carriers from 1 to 15 tonne. The 8 models offer excellent power to weight ratios suitable for a variety of breaker applications and Takeuchi tool carriers.

Built for the toughest construction conditions the robust Takeuchi breakers offer a fully enclosed stylish body casing.

Takeuchi have 2 slim-line breakers, TKB-52 and TKB-72, specifically designed for narrow trench work with enhanced visibility for utilities work.

Takeuchi have 6 sound suppressed breakers with a solid all round cast steel protective body. This eliminates exposed areas compared to conventional breakers where the tie rods are vulnerable when positioned around the edges.

Heavy duty protection on site, seals against dust and debris.

The casing encloses the sound emissions to help reduce dBA sound levels, to help meet the requirements for quieter operating environments.

The sound suppressed range offers significantly quieter breaker performance across the range.

- **POWERFUL RELIABLE AND EASY TO MAINTAIN**
- **SOUND & VIBRATION INSULATION**
- **EXCELLENT POWER TO WEIGHT RATIO**
- **MAXIMUM IN-TRENCH VISIBILITY**

TKB52 SLIMLINE

SPECIFICATION

Breaker Body Weight (kg)	53
Working Weight (kg)	70
Body Length (mm)	574/861
Body Width (mm)	160
Operating Pressure (bar)	100-120
Oil Flow Range (l/min)	15-33
Hose Diameter (mm)	12
Tool Diameter (mm)	36
Impact Rate (bpm)	1300-2500
Noise Level (dB)	121
Carrier Weight (tonnes)	0.8-1.8



TKB72 SLIMLINE

SPECIFICATION

Breaker Body Weight (kg)	81
Working Weight (kg)	105
Body Length (mm)	658/985
Body Width (mm)	185
Operating Pressure (bar)	120-140
Oil Flow Range (l/min)	20-48
Hose Diameter (mm)	12
Tool Diameter (mm)	42
Impact Rate (bpm)	1600-2600
Noise Level (dB)	127
Carrier Weight (tonnes)	1.3-2.7



TKB52-S

SPECIFICATION

Breaker Body Weight (kg)	74
Working Weight (kg)	90
Body Length (mm)	677/964
Operating Pressure (bar)	100-120
Oil Flow Range (l/min)	15-33
Hose Diameter (mm)	12
Tool Diameter (mm)	36
Impact Rate (bpm)	1300-2500
Noise Level (dB)	119
Carrier Weight (tonnes)	0.8-1.8



TKB72-S

SPECIFICATION

Breaker Body Weight (kg)	112
Working Weight (kg)	135
Body Length (mm)	767/1099
Operating Pressure (bar)	120-140
Oil Flow Range (l/min)	20-48
Hose Diameter (mm)	12
Tool Diameter (mm)	42
Impact Rate (bpm)	1600-2600
Noise Level (dB)	123
Carrier Weight (tonnes)	1.3-2.7



TKB102-S

SPECIFICATION

Breaker Body Weight (kg)	156
Working Weight (kg)	180
Body Length (mm)	869/1229
Operating Pressure (bar)	120-140
Oil Flow Range (l/min)	30-63
Hose Diameter (mm)	15
Tool Diameter (mm)	50
Impact Rate (bpm)	1000-2000
Noise Level (dB)	124
Carrier Weight (tonnes)	2.0-4.0



TKB402-S

SPECIFICATION

Breaker Body Weight (kg)	315
Working Weight (kg)	385
Body Length (mm)	1032/1569
Operating Pressure (bar)	90-140
Oil Flow Range (l/min)	40-120
Hose Diameter (mm)	19
Tool Diameter (mm)	80
Impact Rate (bpm)	500-1700
Noise Level (dB)	124
Carrier Weight (tonnes)	4.6-9.0



TKB302-S

SPECIFICATION

Breaker Body Weight (kg)	228
Working Weight (kg)	275
Body Length (mm)	911-1381
Operating Pressure (bar)	90-140
Oil Flow Range (l/min)	35-90
Hose Diameter (mm)	19
Tool Diameter (mm)	72
Impact Rate (bpm)	600-1800
Noise Level (dB)	122
Carrier Weight (tonnes)	3.4-8.0



TKB802-S

SPECIFICATION

Breaker Body Weight (kg)	415
Working Weight (kg)	505
Body Length (mm)	1217/1789
Operating Pressure (bar)	100-140
Oil Flow Range (l/min)	50-150
Hose Diameter (mm)	26
Tool Diameter (mm)	90
Impact Rate (bpm)	500-1700
Noise Level (dB)	127
Carrier Weight (tonnes)	7.0-12.5



AUXILIARY FLOW & PRESSURE

Takeuchi excavators are designed for maximum versatility.
Auxiliary ports are available as standard on Takeuchi excavators.
To achieve maximum machine performance match your hydraulic attachment flow and pressure to the Takeuchi model required.

	1st Aux Max Flow l/min	1st Aux Max Pressure (bar)	2nd Aux Max Flow l/min	2nd Aux Max Pressure (bar)	Standard Aux	Optional Aux	Hitch
TB210R	22	182	N/A	N/A	1st	N/A	N/A
TB216	33	210	10	200	1st	2nd & 3rd	3rd Used for Hitch
TB217R	33	210	10	200	1st	2nd & 3rd	3rd Used for Hitch
TB20e	34	180	11	210	1st, 2nd & 3rd	4th	3rd Low Pressure Hitch
TB320	40	180	11	180	1st, 2nd & 3rd	4th	3rd Low Pressure Hitch
TB225	38	210	13	196	1st & 3rd	2nd & 4th	3rd Used for Hitch
TB325R	40	210	14	196	1st & 3rd	2nd & 4th	3rd Used for Hitch
TB230	54	210	21	200	1st & 3rd	2nd & 4th	3rd Used for Hitch
TB235-2	60	210	22	200	1st & 3rd	2nd & 4th	3rd Used for Hitch

	1st Aux Max Flow l/min	1st Aux Max Pressure (bar)	2nd Aux Max Flow l/min	2nd Aux Max Pressure (bar)	Standard Aux	Optional Aux	Hitch
TB335R	64	210	22	206	1st & 3rd	2nd & 4th	3rd Used for Hitch
TB240	65	206	24	206	1st & 3rd	2nd & 4th	3rd Used for Hitch
TB250-2	92	206	39	206	1st & 3rd	2nd & 4th	3rd Used for Hitch
TB350R	92	206	41	206	1st & 3rd	2nd & 4th	3rd Used for Hitch
TB257FR	105	206	44	206	1st, 2nd & 3rd	4th	3rd Used for Hitch
TB260	102	210	44	206	1st, 2nd & 3rd	4th	3rd Used for Hitch
TB370	120	206 Variable Pressure	46	206 Variable Pressure	1st, 2nd & 3rd	4th	3rd Used for Hitch
TB370W	120	240 Variable Pressure	55	210 Variable Pressure	1st, 2nd & 3rd	4th	3rd Used for Hitch
TB280FR	148	206	59	206	1st, 2nd & 3rd	4th	3rd Used for Hitch
TB290-2	100	210	60	210	1st, 2nd & 3rd	4th	3rd Used for Hitch
TB395W	120	275 Variable Pressure	55	210 Variable Pressure	1st, 2nd & 3rd	4th	3rd Used for Hitch
TB3150R	224	275 Variable Pressure	55.7	245 Variable Pressure	1st, 2nd & 3rd	4th	3rd Used for Hitch
TB3150	224	275 Variable Pressure	55.7	245 Variable Pressure	1st, 2nd & 3rd	4th	3rd Used for Hitch

Disclaimer: All stated figures are a guide, before fitment of hydraulic equipment, machine auxiliary pressure and flow should be accurately measured.

msm

CELEBRATING 50 YEARS

the complete handling service

FORKLIFTS | DIGGERS | DUMPERS

1974 - 2024

Scan the QR Code
to find your local
Takeuchi Dealer



Takeuchi Mfg (UK) Ltd

Head Office

Unit E2B John Boyd Dunlop Drive

Kingsway Business Park

Rochdale OL16 4NG

www.takeuchi-mfg.co.uk e: sales@msmdrh.co.uk

In accordance with our established policy of constant improvement, we reserve the right to amend these specifications at any time without notice. Photographs shown may feature non-standard equipment.



@TakeuchiUK

WORLD CLASS IN EVERY POSITION



**NOW WITH 3-YEAR /
3,000 HOURS WARRANTY***

**FREE 5-YEAR
TAKEUCHI FLEET
MANAGEMENT**

APRIL 2026

FEATURES NEW TB3150 / TB3150R

msm

CELEBRATING 50 YEARS

the complete handling service

FORKLIFTS | DIGGERS | DUMPERS

1974 - 2024



01684 564792



www.msmdrh.co.uk



**Tonero House
Buckholt Drive
Worcester
WR4 9ND**

OUR RANGE

- **MICRO**
TB210R
- **1.6 - 2.5 TONNE RANGE**
TB216, TB20e
- **3 - 9 TONNE RANGE**
TB225, TB230, TB235-2, TB240, TB250-2, TB260, TB370, TB290-2
- **SHORT TAIL RANGE**
TB217R, TB325R, TB335R, TB350R, TB257FR, TB280FR
- **15 TONNE RANGE**
TB3150R, TB3150
- **WHEELED EXCAVATOR**
TB370W, TB395W
- **ELECTRIC EXCAVATOR**
TB20e
- **TRACK DUMPER**
TCR50-3
- **TRACK LOADERS**
TL6R, TL8R-2, TL10V-2, TL12V-2
- **BREAKER RANGE**
TKB52, TKB72, TKB52-S, TKB72-S, TKB102-S, TKB302-S, TKB402-S, TKB802-S
- **AUXILIARY FLOW & PRESSURE**

EXCAVATOR WEIGHT CLASS

- **1-3 TONNE**
TB210R, TB216, TB217R, TB320, TB20e, TB225, TB325R
- **3-9 TONNE**
TB230, TB235-2, TB335R, TB240, TB250-2, TB350R, TB257FR, TB260, TB370, TB280FR, TB290-2
- **15 TONNE**
TB3150R, TB3150
- **WHEELED**
TB370W, TB395W

*T&Cs apply.
Specifications are subject to change
without notice.

The machines featured in this brochure
may be shown with optional equipment.

MADE IN JAPAN

